



# M140

## HIGH FREQUENCY COMPRESSION DRIVER




### Main features:

- Titanium dome diaphragm;
- Ferrite magnet system.


### Main specifications:

- 1,4" Throat diameter;
- 200 W AES program power;
- 108 dB 1W/1m sensitivity;
- 2,8" aluminium voice coil;
- 4,6 kg weight.

Frequency response

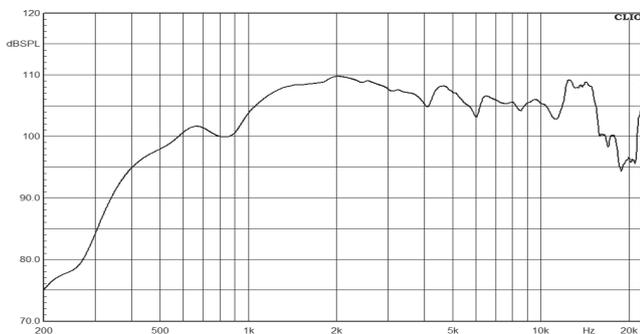

Free air impedance

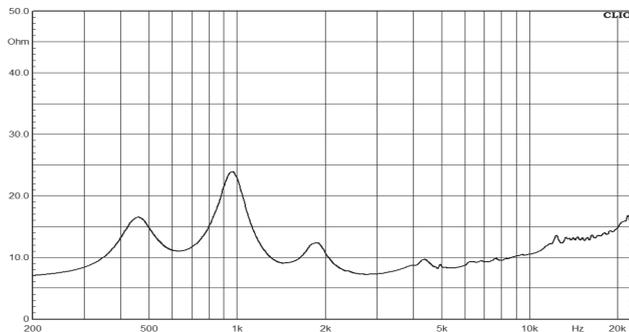

Throat diameter, inches (mm)	1,4(35)
Nominal impedance, Ohm	8/16
Rated power (AES), W	100*
Frequency range, Hz	800-16000
Recommended crossover Hz	1100
Sensitivity (1W / 1m), dB	108

Specifications

Diameter, inches (mm)	2,8(72)
Winding material	aluminum
Diaphragm material	titanium
Magnet material	ferrite
Flux density, T	1,75

Voice coil and Magnetic system

Overall diameter, mm	169
Mounting holes	4x M6
Bolt circle diameter, mm	101,6
Height, mm	66
Net weight, kg	4,6

Mounting information

\* Rated power is determined according to AES2 - 1984 (r2003) standard.

