
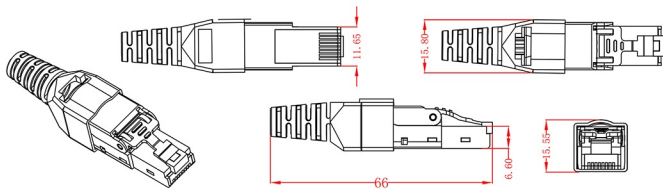


STP Cat.6A Modular Plug

Toolless type

KD-KJ6A-17S



NOTES:

◆ ELECTRICAL:

1. CONTACT RESISTANCE: 20M OHMS MAX
2. INSULATION RESISTANCE: 250M OHMS MIN @ 500 DC
3. WITHSTAND VOLTAGE: DC 1000V AC 700V RMS 60HZ, 1MIN
4. CAT6 PERMANENT LINK: CONFORM TO ANST/TIA/EIA 568B.2-10

◆ ENVIRONMENTAL:

5. STORAGE: -40° / +70°
6. OPERATION: -10° / 60°

◆ MECHANICAL:

7. PLASTIC MATERIAL: PC
8. IDC MATERIAL: PC
9. TERMINAL: PHOSPHOR BRONZE, TIN GOLD 3U " / 6U " / 15U " / 30U " / 50U "
10. RJ45 CONTACT LIFE: 750 TIMES MIN
11. IDC LIFE: 200 TIMES MIN